





HSSLNGRFBKIT

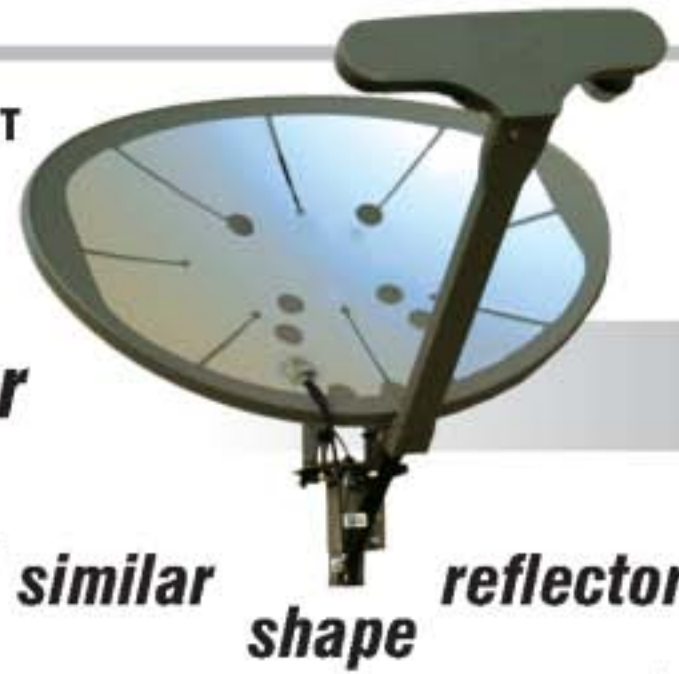

HotShot Dish Heater

Designed for SlimLine antennas or any similar reflector shape

- * Safe low-voltage 24 VAC heater
- * Does not require hiring a licensed electrician for installation
- * Automatic thermostat turns 'on' just above freezing temperatures and 'off' when the dish surface warms up
- * Durable Vinyl material lasts a long time
- * Etched foil resistance heating element
- * Multiple heat zones apply the maximum heat where it's needed most
- * 3M Acrylic adhesive assures a tight bond to the antenna
- * Conforms to the reflector curves and angles
- * One hundred feet of electrical cable provided
- * Heavy-duty wire-wound power transformer provided

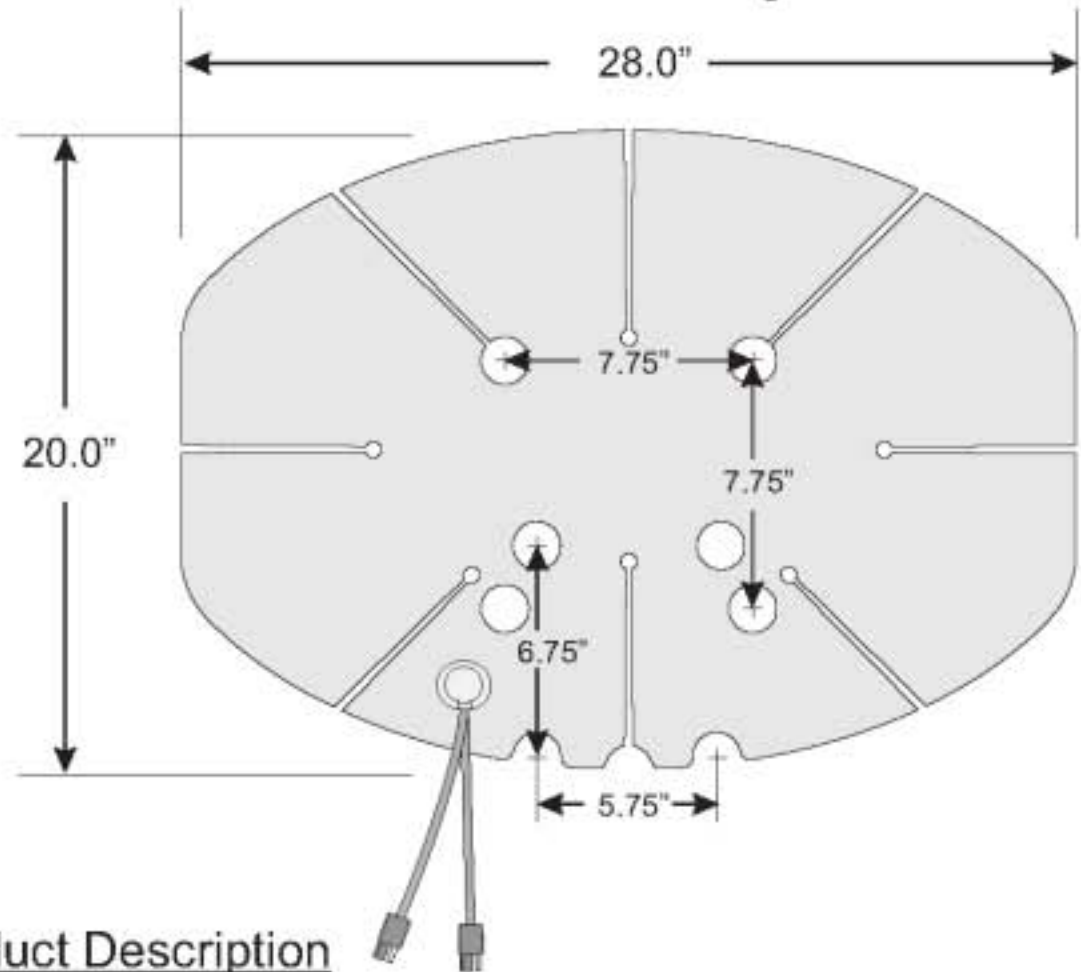

Product Description

The HotShot brand heaters are an exclusive patented invention of Perfect 10. Our heaters have been offered for over 13 years and are used by many thousands of dish owners in snowy climates to aid reception when the weather gets testy.

An optional LNBF support arm heater **HS14ARM** can be connected to this device to prevent snow buildup on the support arm. The arm heater switches on and off in synchronization with the dish heater element.


Electrical

Provided power supply:	HSPS24AC7AMP
Provided wire:	UV resistant 18 ga stranded two-conductor
Thermostat closed:	49° ± 10° F
Thermostat open:	70° F ± 5° F
Heat output:	125.4 Watts ± 10% (Ref 24VAC @ 32° F)

Packaging

Color is silver Vinyl only.
Heater blanket, power supply and 100' x 18 ga 2 conductor in this kit.

HSSLNGRFK Power Supply

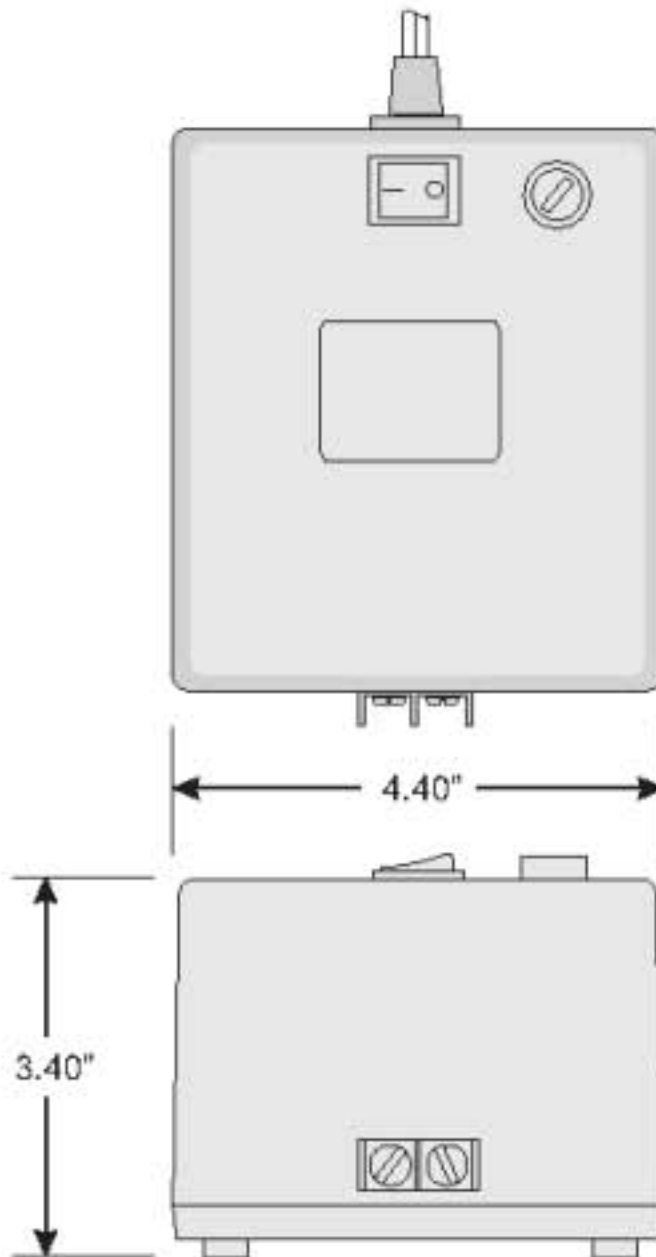

HSPS24AC7AMP

Mechanical High impact ABS body
HSPS24AC7AMP power supply has screw-terminal output connectors
Single pole on/off manual switch
Horizontal surface mounting only

Electrical Input voltage 120VAC.
HSPS24AC7AMP Output voltage 24VAC @ 7 amps maximum
HSPS24AC7AMP replacement fuse is a 2amp slow-blow (BUSS GDC fuse # T2AL250V)
Line voltage power-on indicator lamp

Limitations Inside use only. This device is NOT moisture resistant.

Warranty The heater element and power supply are covered by a one year warranty with limitations as specified on the installation sheet(s).